

Designed with simplicity in mind, the NU2 range hood models are made to exacting standards and offer the most for the money.

SIZE	WHITE	STAINLESS	BLACK	GREASE FILTER (replacement)	CHARCOAL FILTER
24 in.	NU224WW	-	-	BP29	41F
30 in.	NU230WW	NU230SS	NU230BL	BP29	41F

HVI PERFORMANCE						
Duct Orientation	Size	Damper	Sones		CFM	
			Normal	High	Normal	High 0.1 in. w.g.
Vertical - Rectangular	3¼ in. x 10 in.	Included	4.0	7.5	110	160
Horizontal - Rectangular	3¼ in. x 10 in.	Included	4.5	7.0	100	160
Vertical - Round	7 in.	Sold separately	3.5	6.5	140	190

FEATURES	
Control type	2-speed rocker switch
Delay off	no
Filter Clean Reminder	no
Heat Sentry™	no
Lighting	1-level 75-watt bulb (not included)
Grease Filter	Aluminum (Qty. 1)
ENERGY STAR®	no
Recirculation	Charcoal filter sold separately



AC INPUT
120 V, 60 Hz - 2.5 AMPS

OPTIONAL ACCESSORIES	
¾ in. x 10 in. to 6-in. Round Duct Transition	411
7-in. Round Damper	BP87Q
7-in. Round Adapter Plate	SR680508

MOUNTING HEIGHT
18 in. to 24 in. from cooktop to bottom of hood

LIMITED WARRANTY
1-year (See installation manual for full warranty text.)

**FOR INDOOR USE ONLY**

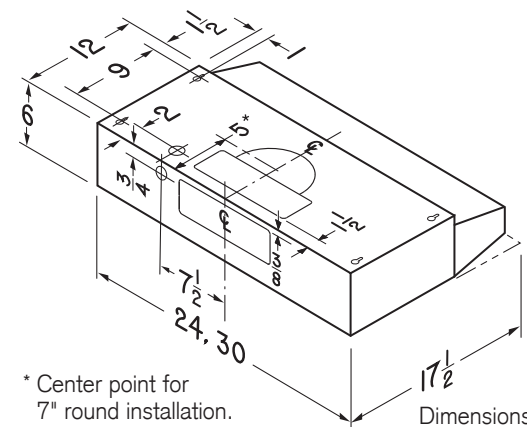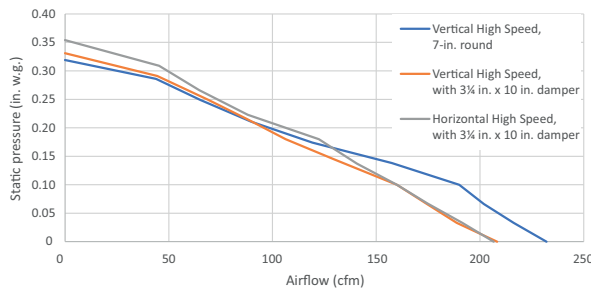

\* Center point for 7" round installation.

Dimensions shown in inches.



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure at high speed based on tests conducted in an HVI-approved state-of-the-art test laboratory. Sones are a measure of human-perceived loudness, based on laboratory measurements.

Conçues en toute simplicité, les hottes de cuisinière de la série NU2 sont fabriquées selon des normes rigoureuses et en offrent davantage pour leur prix.

LARGEUR	BLANC	INOX	NOIR	FILTRE À GRAISSES (remplacement)	FILTRE AU CHARBON
24 po	NU224WW	-	-	BP29	41F
30 po	NU230WW	NU230SS	NU230BL	BP29	41F

PERFORMANCE HVI							
Orientation du conduit	Format	Volet	Sones		pi <sup>3</sup> /m		
			Normale	Haute	Normale	Haute 0,1 po d'eau	
Rectangulaire vertical	3¼ po x 10 po	Inclus	4,0	7,5	110	160	
Rectangulaire horizontal	3¼ po x 10 po	Inclus	4,5	7,0	100	160	
Rond - Vertical	7 po	Vendu séparément	3,5	6,5	140	190	

CARACTÉRISTIQUES	
Type de commande	À bascule, à 2 vitesses
Arrêt différé	non
Rappel d'entretien des filtres	non
Détecteur Heat Sentry <sup>MC</sup>	non
Éclairage	1 intensité, ampoule de 75 watts (non incluse)
Filtres à graisses	Aluminium (qté 1)
ENERGY STAR®	non
Recirculation	Filtre au charbon vendu séparément



ALIMENTATION CA	
120 V, 60 Hz - 2,5 A	

ACCESSOIRES OPTIONNELS	
Transition de 3¼ po x 10 po à 6 po rond	411
Volet rond de 7 po	BP87Q
Plaque pour conduit rond 7 po	SR680508

HAUTEUR DE MONTAGE	
De 18 po à 24 po au-dessus de la surface de cuisson	

GARANTIE LIMITÉE	
1 an (Voir le manuel d'installation pour le texte complet de la garantie.)	

**POUR UTILISATION À L'INTÉRIEUR SEULEMENT**

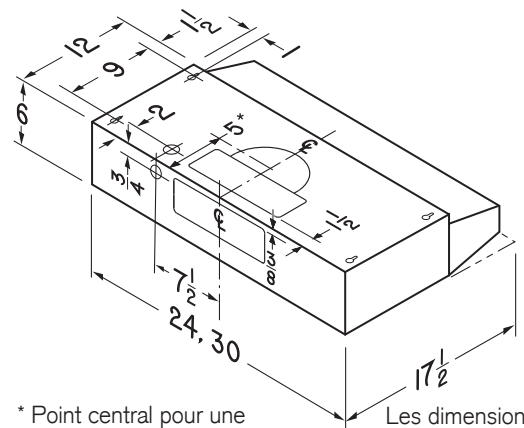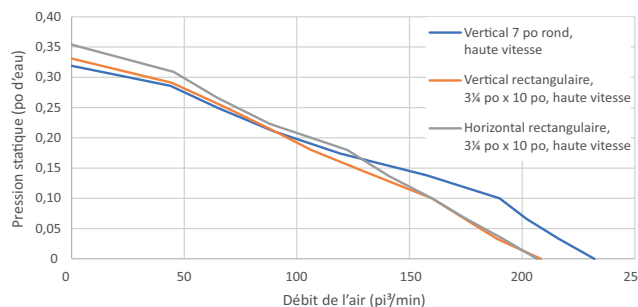

\* Point central pour une installation avec conduit rond de 7 po.

Les dimensions indiquées sont en pouces.



L'HOMOLOGATION HVI-2100 est conforme aux nouvelles techniques et procédures d'essai prescrites par le Home Ventilating Institute pour les produits d'emploi courant, dès leur disponibilité pour les consommateurs. Le rendement du produit est évalué à une pression statique de 0,1 po en haute vitesse d'après les tests effectués dans un laboratoire d'essai ultra-perfectionné approuvé par le HVI. Le sone est une mesure de la perception humaine de la puissance sonore, d'après des mesures effectuées en laboratoire.

99045921G